


DON'T OVERLOAD THE ROAD

SASKATCHEWAN WEIGHT CLASSIFICATION

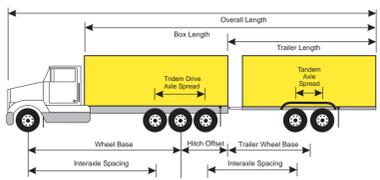

Steer axle weights are subject to the tire size	Configuration	Maximum GVW Allowed
Primary 7 300		24 300
Secondary 5 500		20 000
Winter Primary 7 300		25 300
Winter (S) (M) 5 500		23 500

Straight truck 3 axles

Steer axle weights are subject to the tire size	Configuration	Maximum GVW Allowed
Primary 7 300		41 300
Secondary 5 500		34 500
Winter Primary 7 300		43 300
Winter (S) (M) 5 500		41 500

Straight truck and pony trailer

Steer axle weights are subject to the tire size	Configuration	Maximum GVW Allowed
Primary 7 300		48 300
Secondary 5 500		42 700
Winter Primary 7 300		49 300
Winter (S) (M) 5 500		47 500

Straight truck and full trailer 6 axles

Steer axle weights are subject to the tire size	Configuration	Maximum GVW Allowed
Primary 7 300		29 300
Secondary 5 500		27 300
Winter Primary 7 300		29 300
Winter (S) (M) 5 500		28 300

Tridem drive straight truck 4 axles

Steer axle weights are subject to the tire size	Configuration	Maximum GVW Allowed
Primary 7 300		49 300
Secondary 5 500		43 300
Winter Primary 7 300		50 300
Winter (S) (M) 5 500		48 500

Tridem drive straight truck and pony trailer

Steer axle weights are subject to the tire size	Configuration	Maximum GVW Allowed
Primary 13 600		30 600
Secondary 11 000		25 500
Winter Primary 13 600		31 600
Winter (S) (M) 11 000		29 000

Twin steer tandem drive straight truck

Steer axle weights are subject to the tire size	Configuration	Maximum GVW Allowed
Primary 13 600		51 600
Secondary 11 000		45 500
Winter Primary 13 600		52 600
Winter (S) (M) 11 000		50 000

Twin steer tandem drive straight truck and pony trailer

Steer axle weights are subject to the tire size	Configuration	Maximum GVW Allowed
Primary 13 600		54 600
Secondary 11 000		48 200
Winter Primary 13 600		54 600
Winter (S) (M) 11 000		53 000

Twin steer tandem drive straight truck and full trailer

Steer axle weights are subject to the tire size	Configuration	Maximum GVW Allowed
Primary 13 600		36 600
Secondary 11 000		31 000
Winter Primary 13 600		36 600
Winter (S) (M) 11 000		34 000

Tandem steer tridem drive straight truck

Steer axle weights are subject to the tire size	Configuration	Maximum GVW Allowed
Primary 13 600		62 500
Secondary 11 000		55 000
Winter Primary 13 600		62 500
Winter (S) (M) 11 000		61 800

Tandem steer tridem drive straight truck and pony trailer

TIRE LOADINGS

Tire loading is 10 kg per millimetre (560 lb per inch) width of tire, as stamped by the manufacturer, to a max. of 3 000 kg (6 600 lbs) per tire and subject to axle regulation weights.

WIDE BASE SINGLE TIRES:

Wide base single tires allowed 4 550 kg on Primary Weight Highways
3 850 kg on 9-month Primary Weight Highways during the effective dates
3 850 kg on Secondary Weight Highways during the Winter Weight Period
3 000 kg on Secondary Weight Highways and Municipal Highways

TRIDEM AXLE GROUP LOADINGS

Table 1

Tridem Drive Straight Truck and Pony Trailer Weights


Trailer Wheelbase	Max. Axle Unit Weight
Trailer with single axle:	
6.25 m – 7.50 m	7 200 kg
> 7.50 m	7 700 kg
Trailer with a tandem axle group:	
6.25 m – 7.50 m	11 000 kg
> 7.50 m	12 000 kg
Trailer with a tridem axle group:	
6.25 m – 7.50 m	15 000 kg
> 7.50 m	16 500 kg

Table 2

Tridem Axle Group Weights for Semi-Trailers

Axle Spread	Primary Weight
> 3.6 m – 3.7 m (11'8" – 12'1")	24 000 kg
> 3.0 m – 3.6 m (9'8" – 11'8")	23 000 kg
2.4 m – 3.0 m (7'8" – 9'8")	21 000 kg
Secondary/Municipal	20 000 kg

Note 1: Axle group weights vary according to axle spread
Note 2: 24 000 kg on 63 500kg highways (Appendix E of regulations)

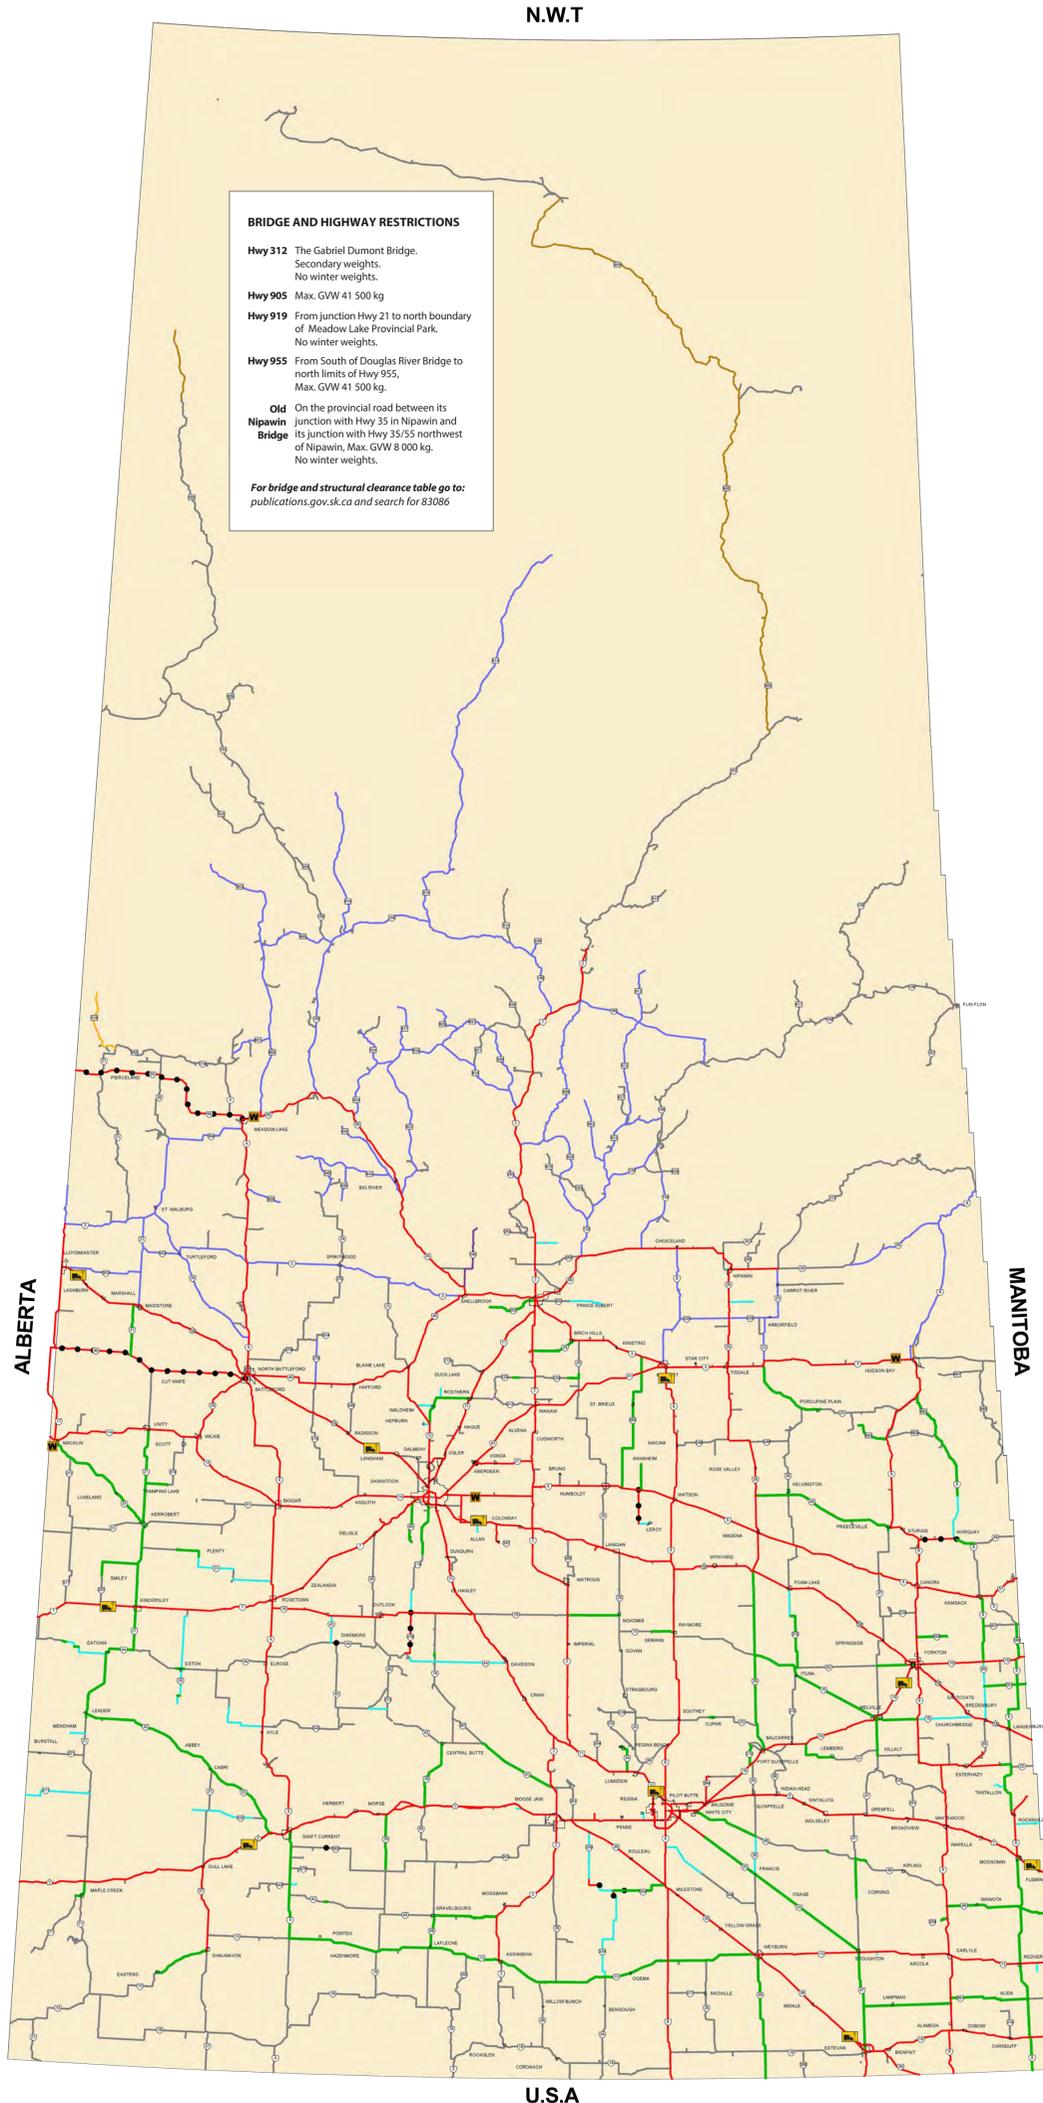

- Primary Weight
- 9 Month Primary Weight, North Zone (15 km rule does not apply)
- 9 Month Primary Weight, South Zone (15 km rule does not apply)
- Primary Weight Highway by Ministerial Order (Refer to Ministerial Order for Specific Weight)
- 75% of Primary Weight Highway
- GVW Limited Highway (Refer to Ministerial Order for Specific Weight)
- 8 000 kg Restricted Highway
- Winter Weight Not Allowed
- Secondary Weight Highways
- Weight Deck
- Inspection Station

CONTACT INFORMATION

Regulations, Policies & Programs

Saskatchewan Ministry of Highways
Toll free in Saskatchewan: 1-866-933-5290
Out of Saskatchewan: 306-933-5290
email: mhitrucking@gov.sk.ca

Road Restrictions & Conditions

Dial 511
Out of Province: 1-888-335-7623
www.saskatchewan.ca/highwayhotline

Permit Office

Saskatchewan Government Insurance (SGI)
Open Daily: 6 A.M. – 10 P.M.
Closed: Christmas, Boxing and New Year's Day
Toll free in Saskatchewan: 1-800-667-7575
Phone: 306-775-6969
Fax: 306-775-6909
Email: sgipermitoffice@sgi.sk.ca

NOTE

This guide is only a summary of *The Vehicle Weight and Dimension Regulations, 2010* and does not include all details. For additional information refer to *The Vehicle Weight and Dimension Regulations, 2010, amendment 16/2019*.

This poster is current up to the date, but the information may be subject to change. For the most current information, please visit the following website www.saskatchewan.ca or www.sgi.sk.ca
July 2022